

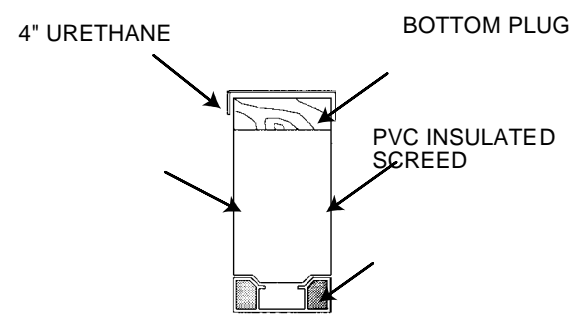


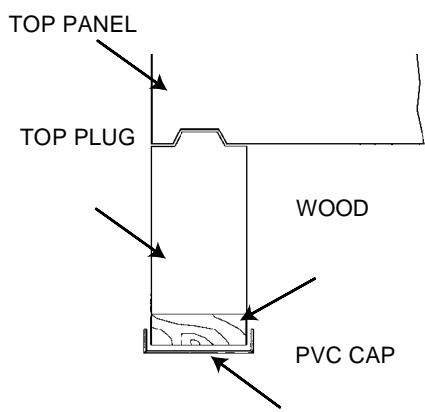

▶ Reach-In Display Doors

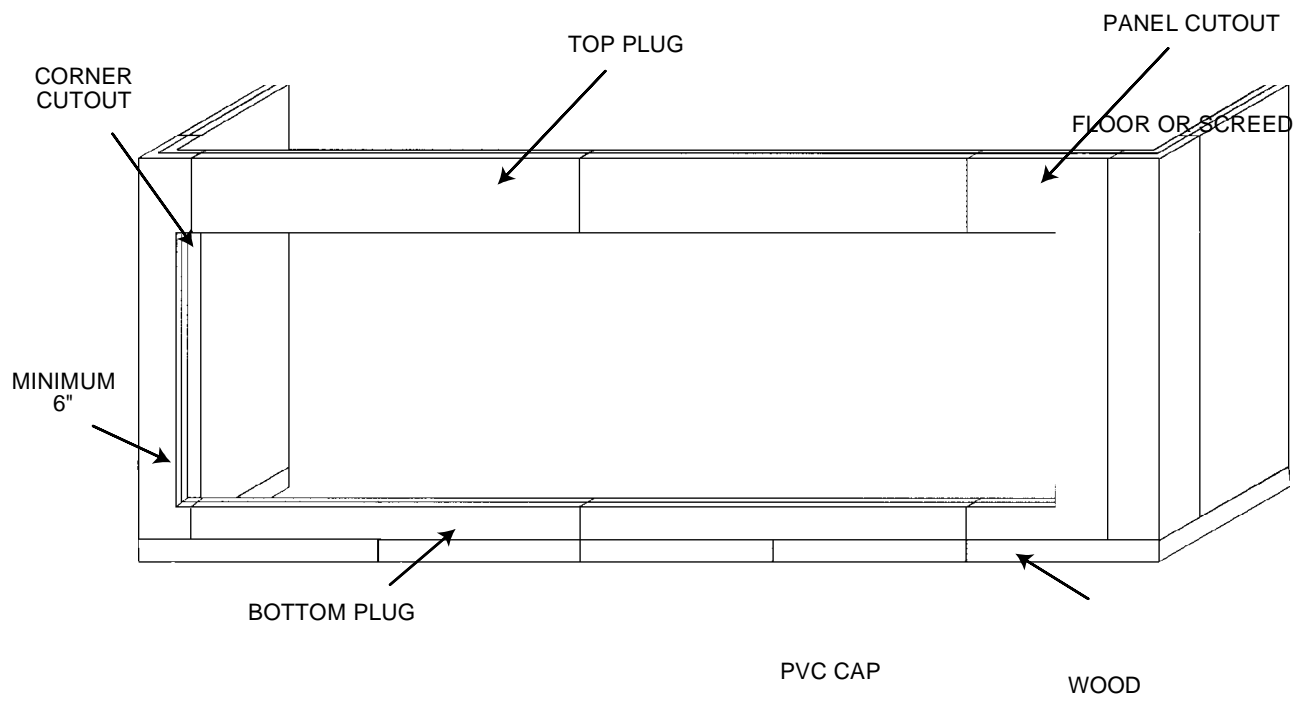

Glass buckopenings may be placed in any wall. The minimum clearance between the buckopening and an outside corner is 6".